




LAUNDRY SOLUTIONS
YOU CAN *DEPEND* ON.

**MORE ENERGY-SAVING SOLUTIONS
THAN ANY OTHER BRAND**

Maytag built the first appliance ever to receive the ENERGY STAR® label. Today we offer more high-efficiency laundry appliances than any other brand — from energy-efficient dryers to highly efficient ENERGY STAR®-qualified washers — to help you save money and build profits.

MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.



FOR YOUR OPERATION:

- Auto Cycle Helps Prevent Laundry Overheating
- Fast-Drying Axial Airflow System
- Extra-Large Door Opening
- Digital Display Shows Time Remaining In Cycle
- Extra-Large Lint Compartment
- Available in 50- and 75-Pound Capacities
- Reverse Tumbler Feature Reduces Twisting
- Factory-Installed Risers

BUILT-TO-LAST™ FEATURES:

- Reversing Dryers With 120-Volt Service
- S.A.F.E. System Puts Out Dryer Fires
- Heavy-Duty Motor


MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ ON-PREMISES DRYING TUMBLERS

MDG51/77PN



**MAYTAG'S
MOST EFFICIENT
MULTI-LOAD DRYER.**

Model MDG51PN

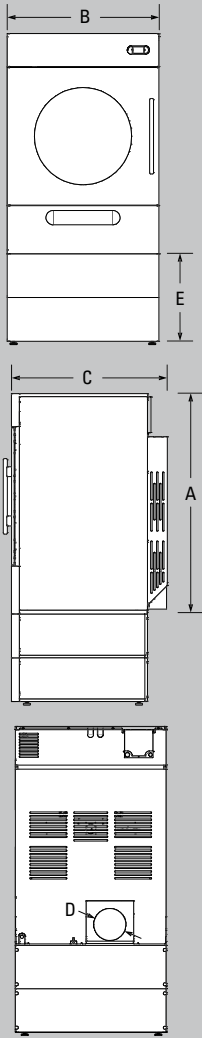

Dimensions will vary according to adjustment of leveling legs; add 1/2" (1.3 cm) minimum.

Maytag® Energy Advantage™ On-Premises Drying Tumblers

MICROPROCESSOR CONTROL

Available in 50- And 75-Pound Capacities

Energy Advantage™ Multi-Load Dryers		
DRYER SPECIFICATIONS		
MODEL	MDG51PN	MDG77PN
CAPACITY		
Lbs. (kg)	50 (22.7)	75 (34)
Cu. ft. (cu. m)	16.17 (.457)	22.2 (.628)
TUMBLER		
Diameter — in. (cm)	37 (93.9)	37 (93.9)
Depth — in. (cm)	26 (66)	35 ⁵ / ₈ (90.5)
MOTOR		
HP (kw) Drive Motor	1 (.746) Reversible	1 (.746) Reversible
AIRFLOW		
Cfm (cmm)	525 (14.8)	560 (15.8)
HEAT INPUT		
BTU/hr. (kcal/hr.)	90,000 (22,680)	110,000 (27,718)
GAS INLET		
In. M.N.P.T.	1/2	1/2
VOLTAGE/BREAKER/FUSE REQUIREMENTS		
Voltage	120	120
Amps	20	20
COLOR		
White	•	•
APPROXIMATE WEIGHT		
Crated — lbs. (kg)	691 (313.4)	776 (352)
Uncrated — lbs. (kg)	671 (304.4)	756 (343)
DIMENSIONS		
A) Height not including legs — in. (cm)	55 ¹ / ₂ (140.9)	55 ¹ / ₂ (140.9)
B) Width — in. (cm)	38 ¹ / ₄ (97.2)	38 ¹ / ₄ (97.2)
C) Depth not including door handle — in. (cm)	39 ¹ / ₄ (99.7)	48 ¹⁵ / ₁₆ (124.3)
D) Exhaust diameter — in. (cm)	8 (20.3)*	8 (20.3)*
E) Riser Height — in. (cm)	22 (55.88)	22 (55.88)
Door opening — in. (cm)	27 ³ / ₈ (69.5)	27 ³ / ₈ (69.5)
* Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.		
See specific instructions for proper installation.		
Because of continuous product improvement, Maytag reserves the right to change specifications without notice.		



MAYTAG® LIMITED WARRANTY

2 YEARS — ALL PARTS
5 YEARS — SHELL,
WELDED FRAME ASSEMBLY,
BASKET, SHAFT ASSEMBLY,
BEARINGS AND SEALS

For a period from the date of original purchase through the times listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



1-800-927-9274